

Flooring solutions, reimagined!



# **Key Features**



Anti-Skid



**Dust Free Installation** 



**Eco-Friendly** 



High Durability



Stain/Scratch Resistant



Fire-Resistant



Water-Resistant



Termite-Resistant



Noise Free Installation



Noise Reduction



Design Friendly



Easy Maintenance

# **SPC Structure**



### **UV** Coating

This essential layer is the thinnest of all. It protects the flooring from stains and UV rays, ensuring that the surface does not fade after a long period of sunlight exposure.

### Wear Layer

This layer acts as protecting shield. Protects the floor against wear and tear and provide enhanced scratch resistance.

### High Definition Decor Film


This premium decor layer gives the flooring realistic wood or stone-grain effect, giving the flooring a timeless look in terms of colour, pattern, and texture.

#### Rigid SPC Core

This thickest and hardest layer of SPC floor is composed of stone powder and PVC resinpowder fused and pressed together, providing strength & durability.

### **IXPE Padding**

The IXPE padding is extremely useful for sound reduction, heat retention, and overall comfort.

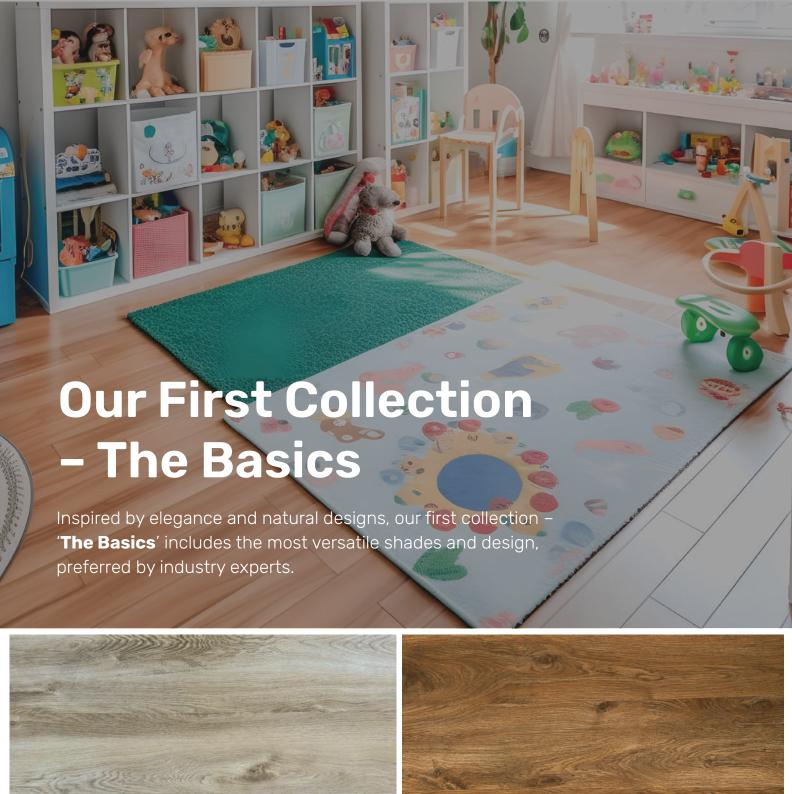





# **CYPRESS**

- Overall Thickness 4 mm
- Wear Layer Thickness 0.3 mm
- Underneath Padding 1 mm IXPE
- Plank Size LxB | 1220x225 mm
- Quantity per box 10 planks
- Area Covered per Box 29.55 sq. Ft
- **Weight of Box** 17.20 kg
- Lock Technology Valinge 2G

- Overall thickness 5 mm
- Wear Layer Thickness 0.3 mm
- Underneath padding 1 mm IXPE
- Plank Size LxB |1220 x 225 mm
- Quantity per box 7 planks
- Area covered per Box 20.68 sq. Ft.
- Weight of Box 15.76 kg
- LockTechnology Valinge 2G





### **WALNUT**

- Overall Thickness 4 mm
- Wear LayerThickness 0.3 mm
- Underneath Padding 1 mm IXPE
- Plank Size LxB |1220 x 225 mm
- Quantity per box 10 planks
- Area Covered per Box 29.55 sq. Ft
- **Weight of Box** 17.20 kg
- Lock Technology Valinge 2G

- Overall thickness 5 mm
- Wear Layer Thickness 0.3 mm
- Underneath padding 1 mm IXPE
- **Plank Size** LxB |1220 x 225 mm
- Quantity per box 7 planks
- Area covered per Box 20.68 sq. Ft.
- Weight of Box- 15.76 kg
- Lock Technology Valinge 2G





# OAK

- Overall Thickness 5 mm
- Wear LayerThickness 0.3 mm
- Underneath Padding 1 mm IXPE
- **Plank Size** LxB |1220 x 225 mm
- Quantity per box 7 planks
- Area Covered per Box 20.68 sq. Ft
- Weight of Box 15.76 kg
- Lock Technology Valinge 2G






# **ASPEN**

- Overall Thickness 5 mm
- Wear Layer Thickness 0.3 mm
- Underneath Padding 1 mm IXPE
- **Plank Size** LxB | 1220x225 mm
- Quantity per box 7 planks
- Area Covered per Box 20.68 sq. Ft
- **Weight of Box** 15.76 kg
- Lock Technology Valinge 2G



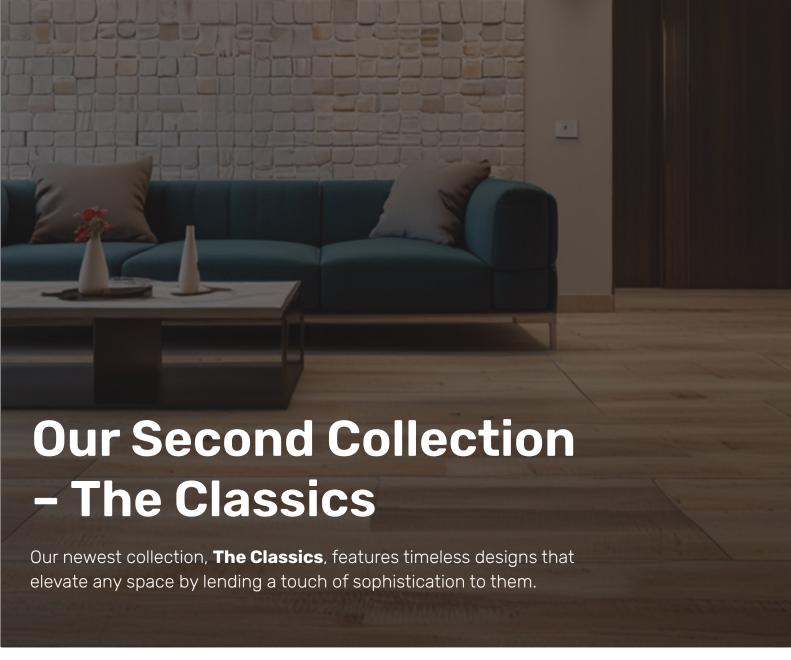









# Rosewood

- Overall thickness 5 mm
- Wear Layer Thickness 0.3 mm
- Underneath padding 1 mm IXPE
- **Plank Size** LxB |1220 x 225 mm
- Quantity per box 7 planks
- Area covered per Box 20.68 sq. Ft.
- Weight of Box 15.76 kg
- Lock Technology Valinge 2G




# Spruce Overall thickness- 5 mm Wear Layer Thickness - 0.3 mm Underneath padding - 1 mm IXPE **Plank Size** – LxB |1220 x 225 mm **Quantity per box-** 7 planks Area covered per Box - 20.68 sq. Ft. Weight of Box - 15.76 kg Lock Technology - Valinge 2G



# Maple

- Overall thickness 5 mm
- Wear Layer Thickness 0.3 mm
- Underneath padding 1 mm IXPE
- Plank Size LxB |1220 x 225 mm
- Quantity per box 7 planks
- Area covered per Box 20.68 sq. Ft.
- Weight of Box 15.76 kg
- Lock Technology Valinge 2G



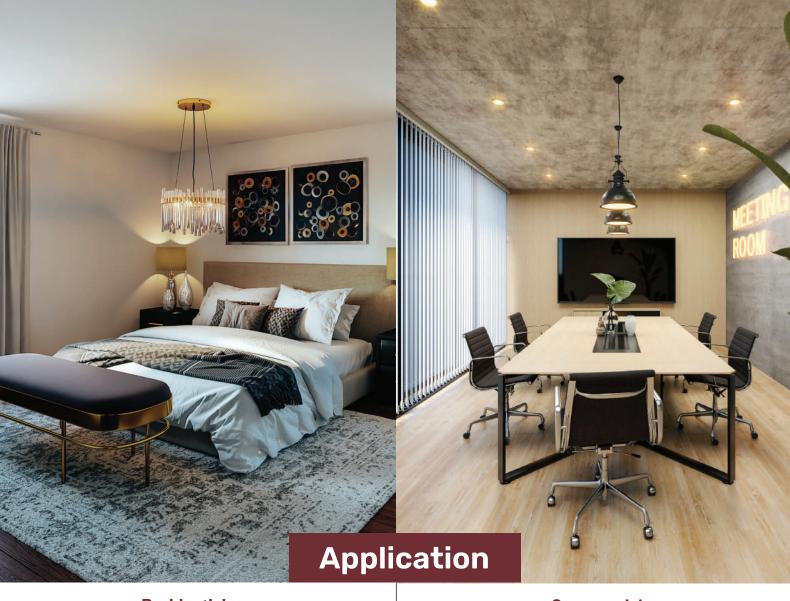

### Residential

Kitchen | Living Room | Bedroom

### Commercial

Shopping & Entertainment Centres | Restaurants & Cafes Office Spaces | Hospitals | Airports & Lounges

# **Pattern Play**

### Random



Recommended (Rustic look, Improved lock strength, Easy & Affordable Installation)


### Brick




### Diagonal



### Grid




### Stagger



# **Technical Specifications**

18	17	16	15	14	13	12	11	10	9	œ	7	6	IJ	4	ω	2	_	#	
Click Type	Gloss Level	IXPE Peeling Strength	UV Scratch	Micro Scratch	Click Tensile (Short Side) ISO 16906	Click Tensile (Long Side)	Dimen Stad Shrinking 80°C - 6 H	Dimen Stad Shrinking 80°C - 6 H	Dimen Stad Shrinking 80°C - 6 H	Peeling Strength	Elasticity Modulus	Bending Strength	Density (kg/m3)	Overall Thickness	Wear Layer Thickness	Backing Type	Plank Dimensions	Parameter	COLLECTION - THE BASICS & THE CLASSICS
	EN 16094	ISO 16906	ISO 1518	EN 16094	ISO 16906	ISO 16906	ISO 23999	ISO 23999	ISO 23999	EN 431	GB 17657	GB 17657	EN 436					Standard	ASICS & 1
ī	6.5 +/- 1	>= 4.5 – 5 N	>= 2200 g	MSR B1 – 2	>= 110 N / 50 mm	>= 110 N / 50 mm	Curling <= 1 mm	ΔW <= 0.15%	ΔL <= 0.15%	>= 60 N / 50 mm	Average >= 3500 mpa	Average >= 18.0 mpa	1940 to 2140 kg/m3	Tolerance = +/- 0.05 mm	Tolerance = +/- 0.03 mm	1 mm IXPE or 1 mm EVA C	mm	Range	HE CLASSICS
Valinge 2G	-/6.4	-/12.7	2200	MSR B1	143 / 285	-/311	0.53 / 0.32	0.09/0.10	0.07 / 0.09	74 / 77.05	4560 / 3536	20.2 / 18.1	2016 / 1993	4/4.98	0.3 mm	1 mm IXPE	4*225*1220 / 5*225*1220	Value	CYPRESS
	Pass	Pass	Pass	Pass	Pass	Pass	Pass	Pass	Pass	Pass	Pass	Pass	Pass	Pass	Pass			Result	U,
Valinge 2G	-/6.1	-/14.1	2200	MSR B1	120 / 274.15	-/333.3	0.4 / 0.37	0.07 / 0.06	0.05 / 0.09	70 / 63.05	5686 / 4182	20.0 / 20.0	2009 / 2002	3.99/5	0.3 mm	1 mm IXPE	4*225*1220 / 5*225*1220	Value	WALNUT
	Pass	Pass	Pass	Pass	Pass	Pass	Pass	Pass	Pass	Pass	Pass	Pass	Pass	Pass	Pass		,	Result	7
Valinge 2G	6.6	8.75	2200	MSR B1	345	345	0.66	0.08	0.13	60.65	3721	18	2019	4.99	0.3 mm	1 mm IXPE	5*225*1220	Value	OAK
	Pass	Pass	Pass	Pass	Pass	Pass	Pass	Pass	Pass	Pass	Pass	Pass	Pass	Pass	Pass			Result	
Valinge 2G		-	2200	MSR B2	224	1	0.33	0.09	0.03	77	4841	23.3	2025	5.02	0.3 mm	1 mm IXPE	5*225*1220	Value	ASPEN
	Pass	Pass	Pass	Pass	Pass	Pass	Pass	Pass	Pass	Pass	Pass	Pass	Pass	Pass	Pass			Result	
Valinge 2G	6.3	14.2	2200	MSR B1	260	354	0.30	0.06	0.06	66.85	4748	19	2013	4.99	0.3 mm	1 mm IXPE	5*225*1220	Value	ROSEWOOD
v	Pass	Pass	Pass	Pass	Pass	Pass	Pass	Pass	Pass	Pass	Pass	Pass	Pass	Pass	Pass	ī		Result	8
Valinge 2G	7	6.25	2200	MSR B1	336.65	332.4	0.98	0.05	0.11	62.25	4033	19.8	1990	4.99	0.3 mm	1 mm IXPE	5*225*1220	Value	SPRUCE
	Pass	Pass	Pass	Pass	Pass	Pass	Pass	Pass	Pass	Pass	Pass	Pass	Pass	Pass	Pass			Result	
Valinge 2G	6.3	15.75	2200	MSR B1	219.15	334.2	0.59	0.09	0.09	70.3	3778	18	1978	5	0.3 mm	1 mm IXPE	5*225*1220	Value	MAPLE
	Pass	Pass	Pass	Pass	Pass	Pass	Pass	Pass	Pass	Pass	Pass	Pass	Pass	Pass	Pass	·		Result	

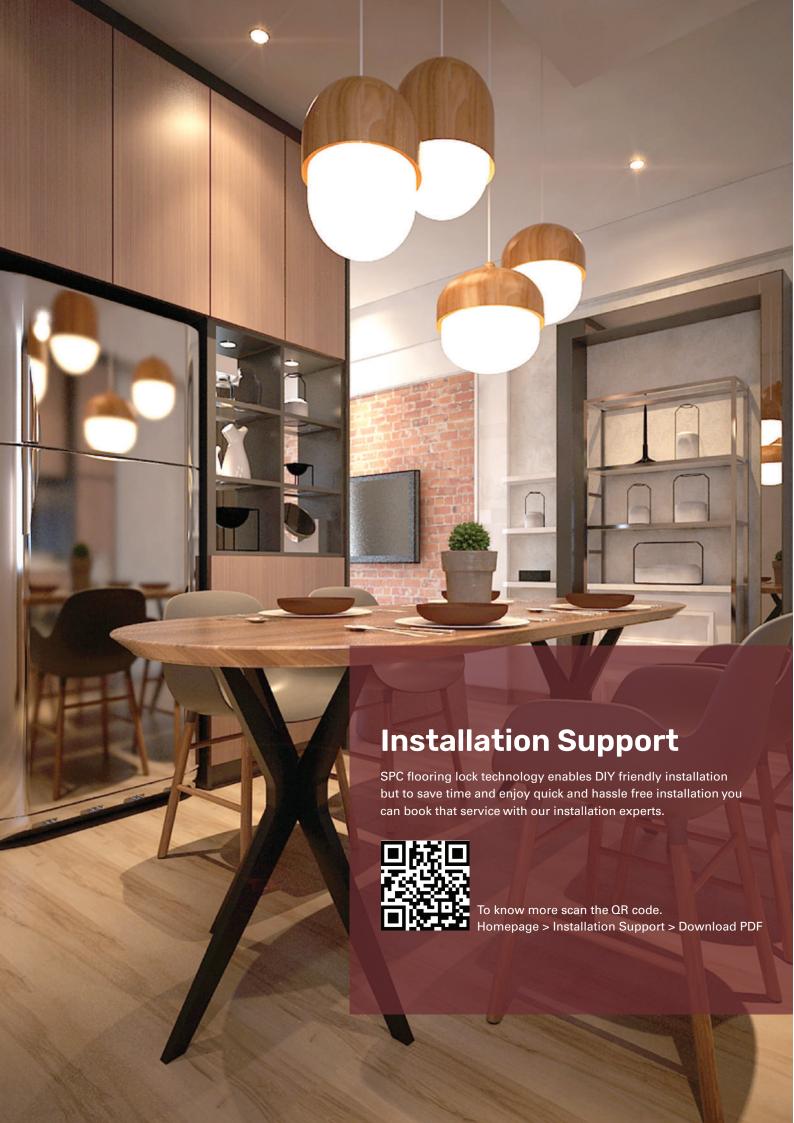

Customer Care Number: +91 8369127163

Available between: 10 am to 6 pm (Monday to Friday)

E- mail ID: support@formosafloors.in

To check our products and for more information please visit our website

www.formosafloors.in

